
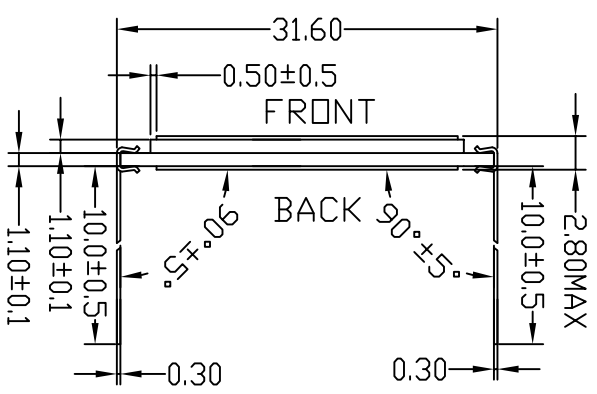
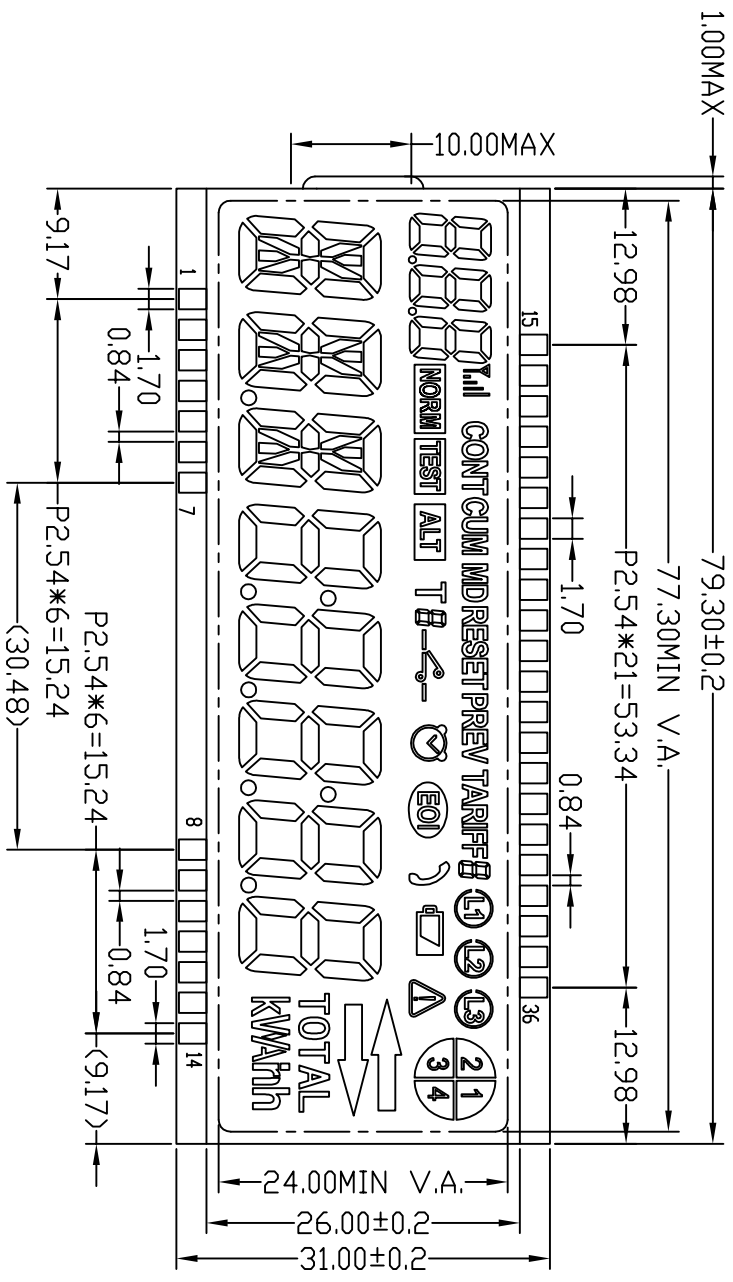


编号	修改记录
00	新开发

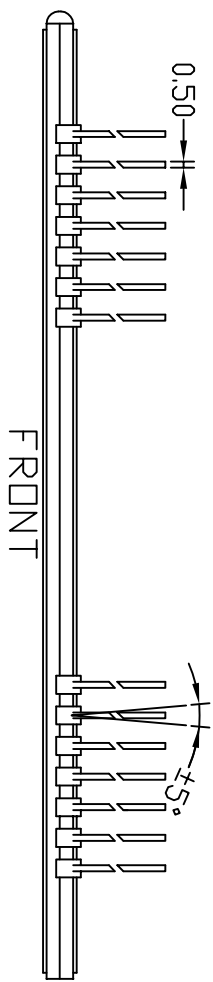

1. DRIVING VOLTAGE : 3.3V, 1/6DUTY, 1/3BIAS
2. STORAGE TEMPERATURE : -30 °C TO 85 °C
3. OPERATING TEMPERATURE : -20°C TO 80 °C
4. VIEWING DIRECTION : 6 O'CLOCK
5. DISPLAY MODE : HTN(3) POSITIVE
6. FRONT POLARIZER : TRANSMISSIVE
7. BACK POLARIZER : REFLECTIVE
8. CONNECTORS : PIN
9. SCREEN PRINTING :
10. REMARKS : 老化测试条件85°C\*95%RH\*500hr



**MS Multisight Display Co., Ltd.**

MODEL No.:	M9322	VER:	00	UNIT	MILLIMETRE
DESIGNER	ZZE	DATE	24-10-24	PAGE	1 OF 2
CHECKED	JOAN	DATE	24-10-24		
APPROVED	RBT	DATE	24-10-24		



# 此页仅供逻辑参考

# 全显示效果图

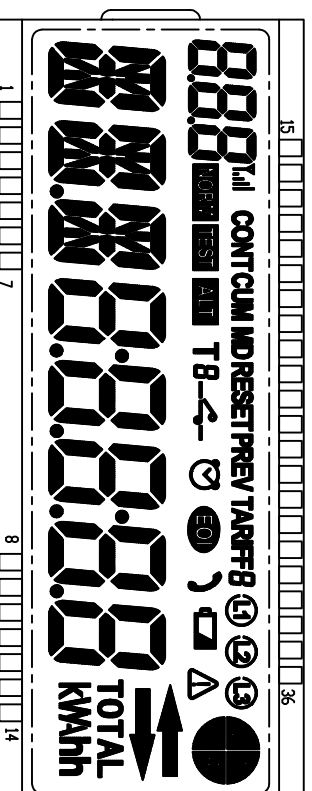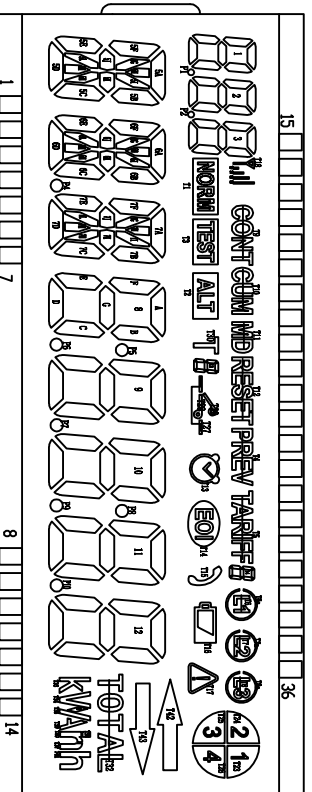

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM0	1D	P1	2D	P2	3D	T3	T2	T30	13D	8A	T27	9A	10A	T14	COM0	--	--	--	--	--
COM1	5F	5A	5B	6F	6A	6B	7F	7A	7B	8F	9F	9B	10F	11F	--	--	--	--	--	--
COM2	5G	5H	5I	6G	6H	6I	7G	7H	7I	8G	8B	9G	10G	10B	--	--	--	--	--	--
COM3	5J	5M	5K	6J	6M	6K	7J	7M	7K	8E	P5	9C	10E	P8	--	--	--	--	--	--
COM4	5L	5D	5N	6L	6D	6N	7L	7D	7N	8D	9E	9D	10D	11E	--	--	--	--	--	--
COM5	5E	--	5C	6E	P4	6C	7E	--	7C	--	8C	P6	P7	10C	--	--	--	--	--	COM5

PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
COM0	1C	2C	3C	--	T1	13E	13C	T28	T16	--	--	T37	T38	--	12A	11A
COM1	1E	2E	3E	--	T22	13G	13B	T29	T15	T43	T32	T41	T40	--	12F	11B
COM2	1G	2G	3G	--	T21	13F	13A	T13	T13	T42	T25	T26	T39	--	12G	11G
COM3	1B	2B	3B	--	T20	T9	T5	14E	14C	T17	T24	T23	T36	12B	12E	11C
COM4	1F	2F	3F	--	T19	T10	T4	14G	14B	T6	T7	T8	T35	12C	12D	11D
COM5	1A	2A	3A	--	T18	T11	T12	14F	14A	T6a	T7a	T8a	T34	T33	P10	P9



MODEL No.:	M9322	VER:	00	UNIT	MILLIMETRE
DESIGNER	ZZE	DATE	24-10-24	PAGE	2 OF 2
CHECKED	JOAN	DATE	24-10-24		
APPROVED	RBT	DATE	24-10-24		



## 真值表